




Castell


Bollard Light

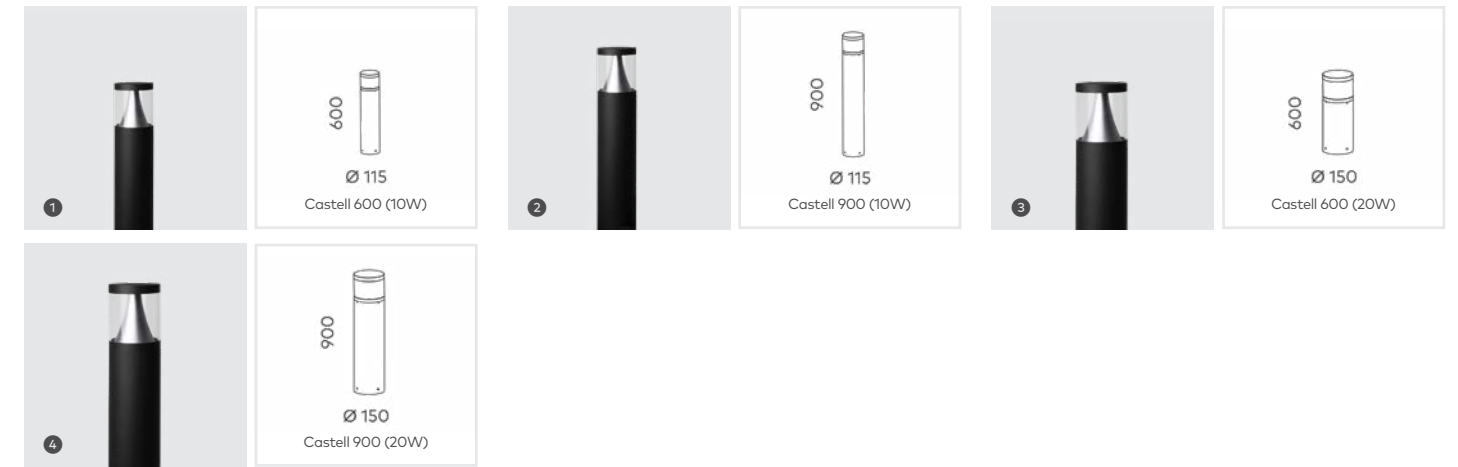

	LED Power	Lumens (at 3000K)	Beam	Weight
1 2 Castell (10W)	10W (700mA)	640lm	50°	Up to 4kg
3 4 Castell (20W)	20W (500mA)	1030lm	50°	Up to 7kg

Key Information		Design		Performance		Driver	
Mounting	Surface Mounted	Material	Powder Coated Aluminium	Lumen efficacy	Up to 58lm/W	Non-Dim	Built-in
Finish	■ Textured Black	IP Rating	IP65	CRI (Ra/R9)	80+ (R9: >0)	DALI	Remote
CCT	■ 3000K	IK Rating	IK10	Lifetime (Ta 25°C)	>54,000h L70B10	Bluetooth	Remote
Warranty	3 Years	Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		





Castell 900
 Bollard Light
 10W
 Textured Black
 Sidewood Estate

Castell 600
 Bollard Light
 10W
 Textured Black
 Forest Hall UWA

Castell

Bollard Light

