



Edge

WALL LIGHT 

 Class III DC 9-16V 700mA	Power 10 Watts	IP Rating 65	Material Aluminium	Warranty 3 Years				
---	--------------------------	------------------------	------------------------------	----------------------------	---	---	---	---


CAUTION – Must Be Installed By A Licensed Electrician Please read instruction manual on **both** sides carefully before installing luminaire.

- Please read instructions for installation of luminaire provided below. Safety of this luminaire and warranty will be voided unless followed.
 - Installation and operation of this luminaire must be within accordance with national safety regulations. Unios® does not warrant any liability when damage is caused by misuse or improper installation.
- This luminaire is void of warranty if any part has been modified. Please visit unios.com/warranty for more information.
 - Over-voltage protection units should be installed to prevent electronic control gear from failing due to electrical spikes, e.g. from switching of inductive loads.

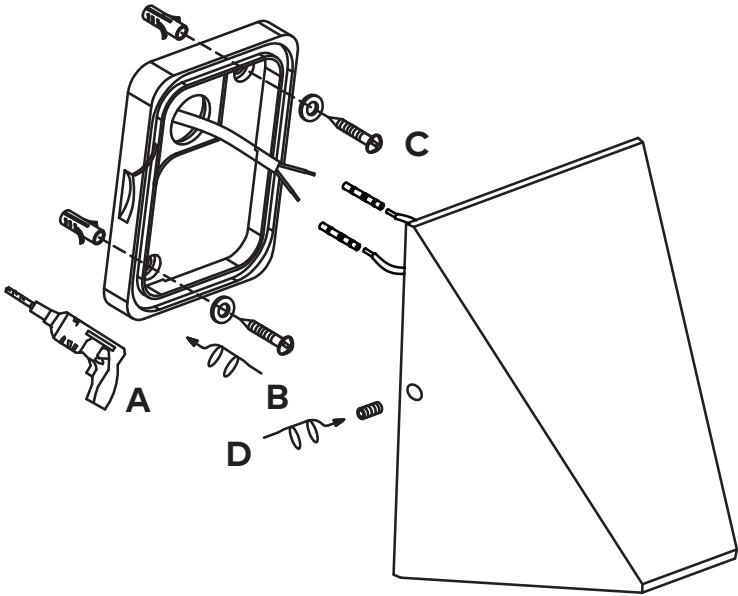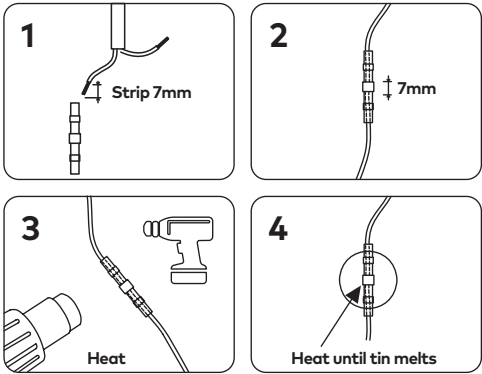

Mounting Plate

The gasket supplied with the wall bracket **must** be used during electrical installation to ensure no water ingress through the back of the fitting. It is strongly advised to also use a sealant to ensure a full seal around the cable entry and mounting holes.

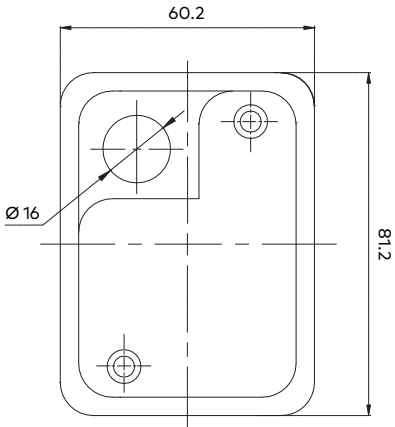


Installation Instructions

- 1 Must be installed by a licensed electrician.
- 2 Before installing, make sure the power supply is switched off.
- 3 Follow the steps in the figure shown for installation:
 - A. Drill mounting holes and pull wires through mounting plate.
 - B. Fix the mounting plate onto wall with screws (ensuring seal washers are used - included in box).
 - C. Use supplied terminal block to terminate SELV wires from electronic control gear.
 - D. Fix the luminaire onto the mounting bracket with screws ensuring luminaire is firmly pressed evenly to ensure back remains sealed.


Note: After completing above steps, ensure the luminaire is firmly fixed to the mounting plate. The luminaire must be cleaned following these installation instructions. Termination of wiring and installation of the product shall be conducted such that the luminaire's stated IP rating is not affected.




Accessories (Included)




2x Wall Plugs




2x Wall Screws



1x Allen Key



2x Heatshrink Solder Joiners




2x Seal Washers

Wiring

This luminaire must be installed in conjunction with remote 700mA Constant Current electronic control gear.

Warning: Multiple luminaires must be wired in series. Please refer to electronic control gear.




Dimming

Luminaire can be dimmed depending on supplied LED driver. Please refer to supplied LED driver instruction manual for dimming topology.




Class III

Luminaire in which protection against electric shock is provided by the use of Extra Low Voltage.



IP65

Protected against dust completely and Jets of water from all directions.



CC

700mA Constant Current driver Supply.



Outdoor Use

This luminaire is suitable for outdoor use, taking in consideration of the IP rating.

Cleaning

Before cleaning, disconnect from mains supply and allow luminaire to cool.

Regular cleaning of the luminaire is **strongly recommended**. In harsher conditions, it is recommended that a strict cleaning schedule is in place to ensure no eroding chemicals are left on the surface for long periods. To clean luminaire, only use a damp, microfibre cloth. A dilute solution of a mild pH-neutral liquid detergent can be used for resistant dirt (Solvents must not be used). Please note surface of luminaire must be wiped down with a clean damp microfibre cloth to ensure no residue is left on the surface. Take care not to damage the surface of the luminaire. Do not use high pressure cleaners.

Corrosion Protection

It is important to note that care must be taken during installation or maintenance to ensure that the surface of the luminaire is not damaged. Any damage, which is exposed to moisture will result in corrosion occurring.

Please also note that any chemical applications on the luminaire will cause corrosion of the surface of the luminaire and will void the warranty.

Cleaning of Luminaire Lens

The luminaire lens or glass can be cleaned with glass specific cleaning agents that are ph-neutral, alcohol-free and non-abrasive. Always use a damp microfibre cloth and take care not to damage any seals surrounding the glass.

