




## Cluster

## Inground Uplight

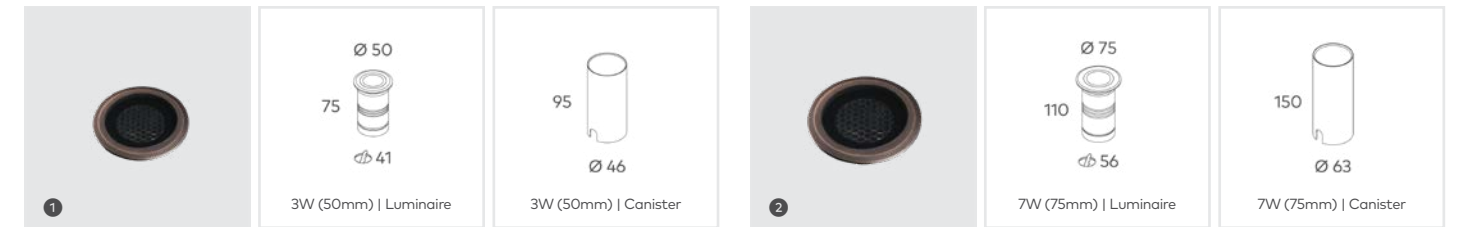

	LED Power	Lumens (at 3000K)	Beam	Weight	Lifetime (Ta 25°C)	
1	3W (50mm)	3W (24V DC)	138lm	15°	434g	>60,000h L80B10
2	7W (75mm)	7W (24V DC)	282lm	15°   30°	1.0kg	>50,000h L70B10

### Key Information

Mounting	Recessed
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> 316 Stainless Steel <input type="checkbox"/> Dark Bronze
CCT	3000K
Warranty	3 Years

### Design


Material	316 Stainless Steel, Solid Brass for Dark Bronze Finish
IP Rating	IP67
IK Rating	IK09
Maximum Load	800kg
Class Rating	Class III

### Performance

Lumen efficacy	Up to 57lm/W
CRI (Ra/R9)	80+ (R9: >0)
Ambient Temperature Range	10°- 30°C
SDCM	≤3

### Driver

Non-Dim	Remote, wired in parallel
---------	---------------------------

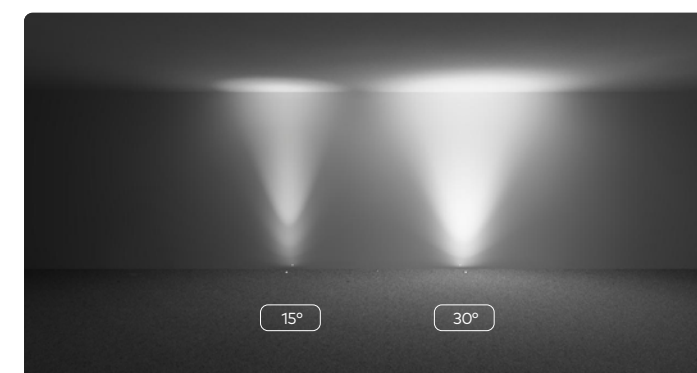



**Cluster**  
Inground Uplight  
7W  
Textured Black  
Lien Huong Store

**Cluster**  
Inground Uplight  
3W  
Textured Black  
Knox Children & Family Centre

Cluster

Inground Uplight

