




Cuadro

Wall Light

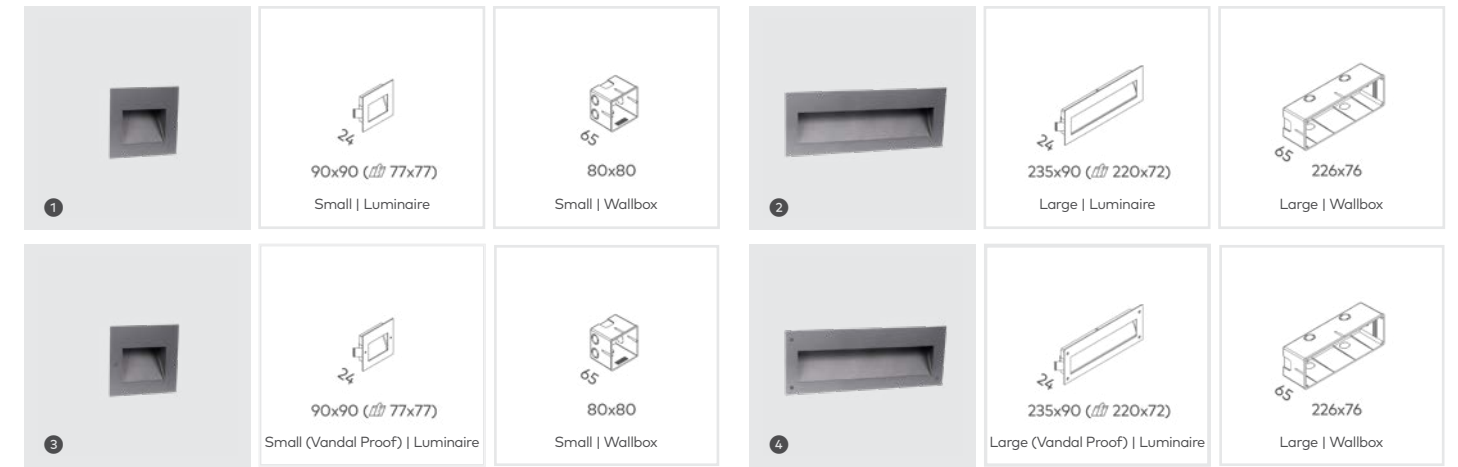

		LED Power	Lumens (at 3000K)	Beam	Weight
1 3	Small	2W (24V DC)	60lm	90°	742g
2 4	Large	8W (24V DC)	363lm	90°	264g

Key Information		Design		Performance		Driver	
Mounting	Wall Recessed	Material	Powder Coated Aluminium, PVC Wall Box	Lumen efficacy	Up to 27lm/W	Non-Dim	Remote, wired in parallel
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White <input type="checkbox"/> Textured Grey	IP Rating	IP65	CRI (Ra/R9)	80+ (R9->0)	Phase Cut	Remote, wired in parallel
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IK Rating	IK10	Lifetime (Ta 25°C)	>54,000h L70B10	DALI	Remote, wired in parallel
Warranty	3 Years	Class Rating	Class III	Ambient Temperature Range	10°- 30°C	Bluetooth	Remote, wired in parallel
				SDCM	≤3		

