





Diamond G2 High Colour

Panel Light

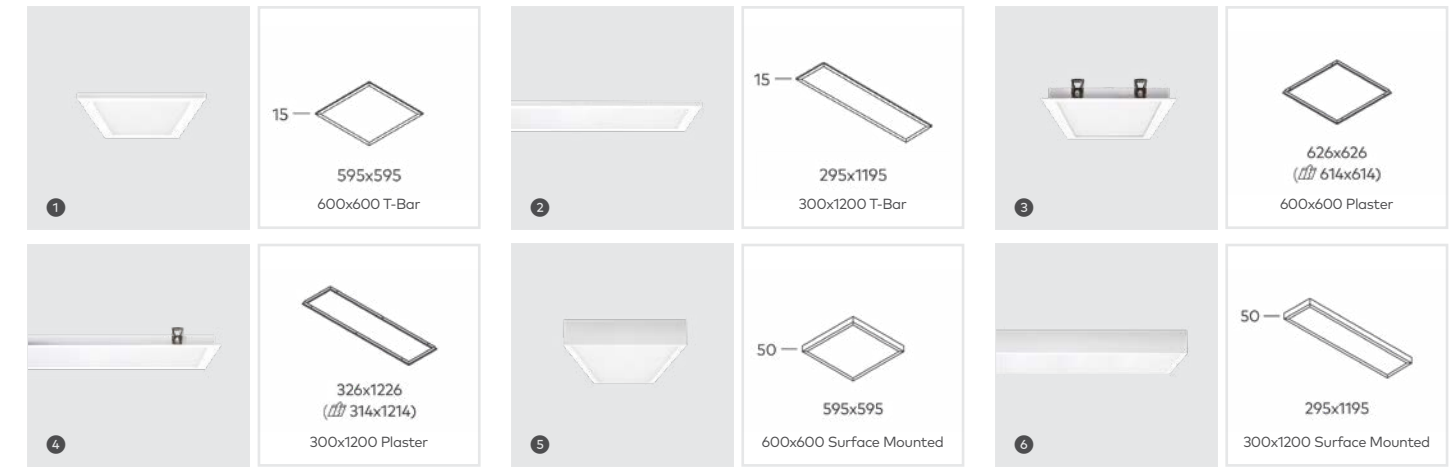

	LED Power	Lumens (at 3000K)	Beam	Weight (T-Bar)
1 3 5 600 x 600	17W (500mA)	1887lm	90°	3.7kg
	25W (750mA)	2831lm		
	33W (1000mA)	3775lm		
2 4 6 300 x 1200	17W (500mA)	1787lm	85°	3.8kg
	25W (750mA)	2681lm		
	33W (1000mA)	3574lm		

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed, Ceiling Surface, Ceiling Suspended	Material	Powder Coated Aluminium, PMMA LGP, Polycarbonate (PC) Diffuser	Lumen efficacy	Up to 107lm/W	Non-Dim	Remote
Finish	<input type="checkbox"/> Matt White	IP Rating	IP44 (Room Side)	CRI (Ra/R9)	90+ (R9: >50)	Phase Cut	Remote
LED CCT	<input checked="" type="checkbox"/> 3000K <input checked="" type="checkbox"/> 4000K	Class Rating	Class II	UGR	<19	DALI	Remote
Warranty	5 Year	Insulation Rating	IC-4	Lifetime (Ta 25°C)	>69,000h L80B10	Bluetooth	Remote
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		
				COI Compliance model requirements	4000K		

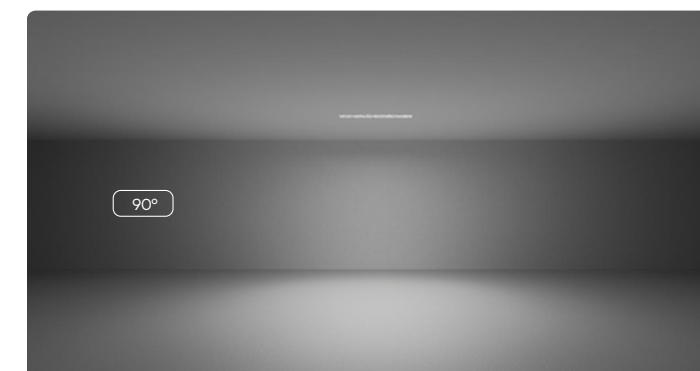


- Available Accessories**
- Plaster Kit
 - Surface Mount Kit
 - 2m Suspension Kit
 - Seismic Lanyard Kit




Diamond G2 High Efficiency

Panel Light

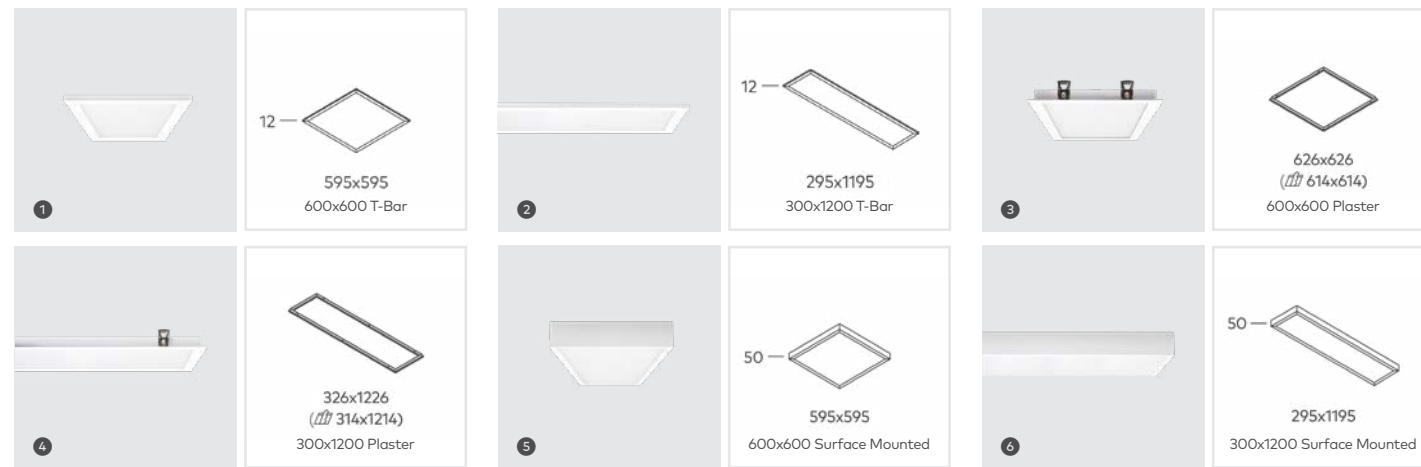

	LED Power	Lumens (at 3000K)	Beam	Weight (T-Bar)
1 3 5 600 x 600	17W (500mA)	2413lm	90°	3.7kg
	25W (750mA)	3505lm		
2 4 6 300 x 1200	17W (500mA)	2137lm	90°	3.8kg
	25W (750mA)	3139lm		

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed, Ceiling Surface, Ceiling Suspended	Material	Powder Coated Aluminium, PMMA LGP, Polycarbonate (PC) Diffuser	Lumen efficacy	Up to 139lm/W	Non-Dim	Remote
Finish	<input type="checkbox"/> Matt White	IP Rating	IP40	CRI (Ra/R9)	80+ (R9: >0)	Phase Cut	Remote
LED CCT	<input checked="" type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Class Rating	Class II	UGR	<19	DALI	Remote
Warranty	5 Year	Insulation Rating	IC	Lifetime (Ta 25°C)	>69,000h L80B10	Bluetooth	Remote
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

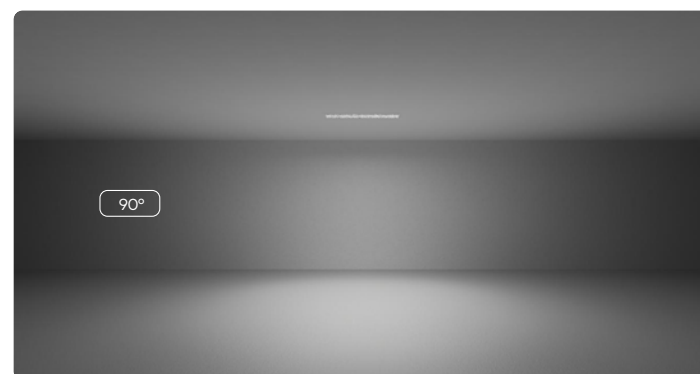


Available Accessories

- Plaster Kit
- Surface Mount Kit
- 2m Suspension Kit
- Seismic Lanyard Kit




Diamond G2 Essential

Panel Light

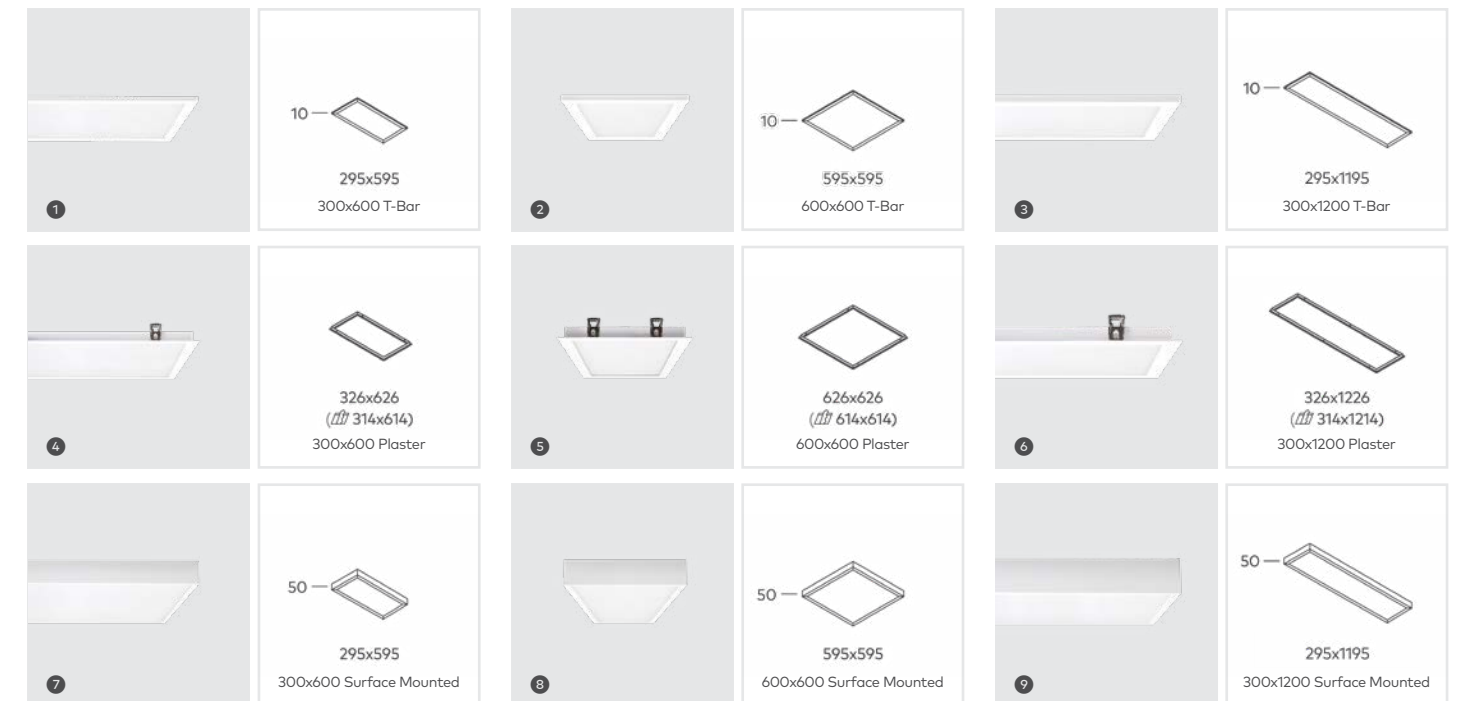

	LED Power	Lumens (at 3000K)	Beam	Weight (T-Bar)
1 4 7 300 x 600	26W (750mA)	2522lm	100°	1.8kg
2 5 8 600 x 600	27W (750mA)	2989lm	90°	3.4kg
	35W (1000mA)	3852lm		
3 6 9 300 x 1200	27W (750mA)	2536lm	90°	3.6kg
	35W (1000mA)	3266lm		

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed, Ceiling Surface, Ceiling Suspended	Material	Powder Coated Aluminium, MS LGP, Polycarbonate (PC) Diffuser	Lumen efficacy	Up to 114lm/W	Non-Dim	Remote
Finish	<input type="checkbox"/> Matt White	IP Rating	IP40	CRI (Ra/R9)	80+ (R9: >0)	Phase Cut	Remote
LED CCT	<input checked="" type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Class Rating	Class II	UGR	<19	DALI	Remote
Warranty	5 Year	Insulation Rating	IC	Lifetime (Ta 25°C)	>69,000h L80B10	Bluetooth	Remote
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

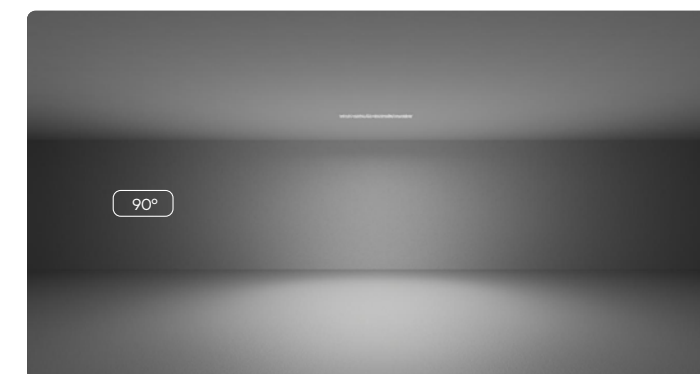

Available Accessories

- Plaster Kit
- Surface Mount Kit
- 2m Suspension Kit
- Seismic Lanyard Kit

