





Emerald

Deck Light

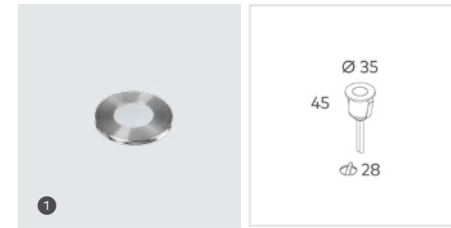

	LED Power	Lumens (at 3000K)	Beam	Weight
1 Emerald Deck Light	0.6W (24V DC)	32lm	70°	130g

Key Information		Design		Performance		Driver	
Mounting	Recessed	Product Family	Emerald	Lumen efficacy	Up to 55lm/W	Non-Dim	Remote, wired in parallel
Finish	316 Stainless Steel	Material	316 Stainless Steel	CRI (Ra/R9)	80+ (R9: >0)		
CCT	3000K 4000K	IP Rating	IP67	Lifetime (Ta 25°C)	>54,000h L70B10		
Warranty	3 Years	Class Rating	Class III	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

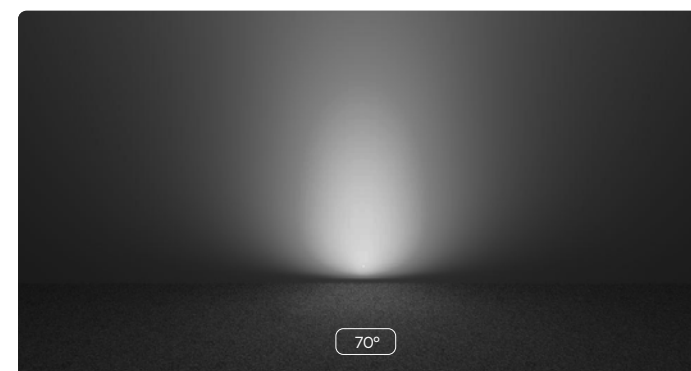

Available Accessories
2m Extension Kit
Cable Kit (10m & 20m)

