




Emerald

Spike Light

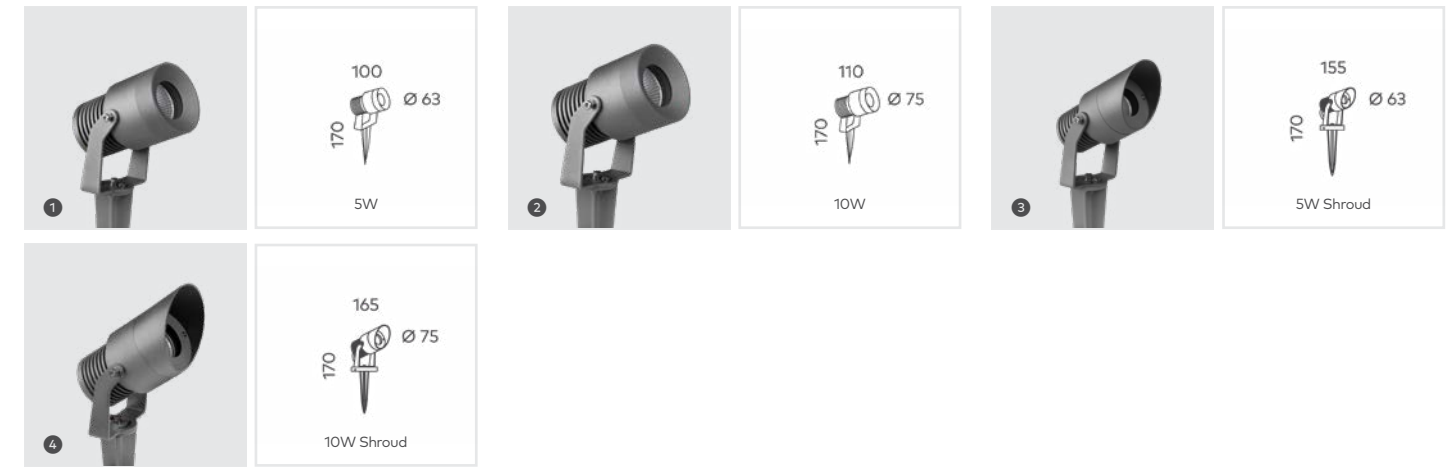

	LED Power	Lumens (at 3000K)	Beam	Weight	Lifetime (Ta 25°C)	
1 3	5W	5W (24V DC)	319lm	15° 24° 38°	770g	>60,000h L80B10
2 4	10W	10W (24V DC)	865lm	15° 24° 38°	1.1kg	>50,000h L70B10

Key Information

Mounting	In-ground
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured Grey
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K
Warranty	5 Years

Design


Product Family	Emerald
Adjustability	270° Tilt
Material	Powder Coated Aluminium, PVC Spike
IP Rating	IP65
Class Rating	Class III

Performance

Lumen efficacy	Up to 71lm/W
CRI (Ra/R9)	80+ (R9: >0)
Ambient Temperature Range	10°- 30°C
SDCM	≤3

Driver



Non-Dim	Remote, wired in parallel
---------	---------------------------

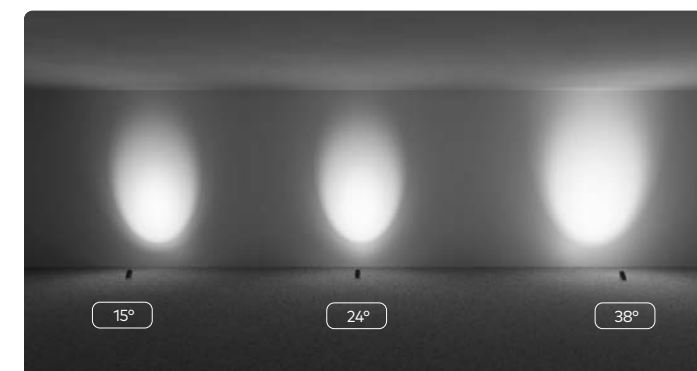

Available Accessories

Spotlight Shroud



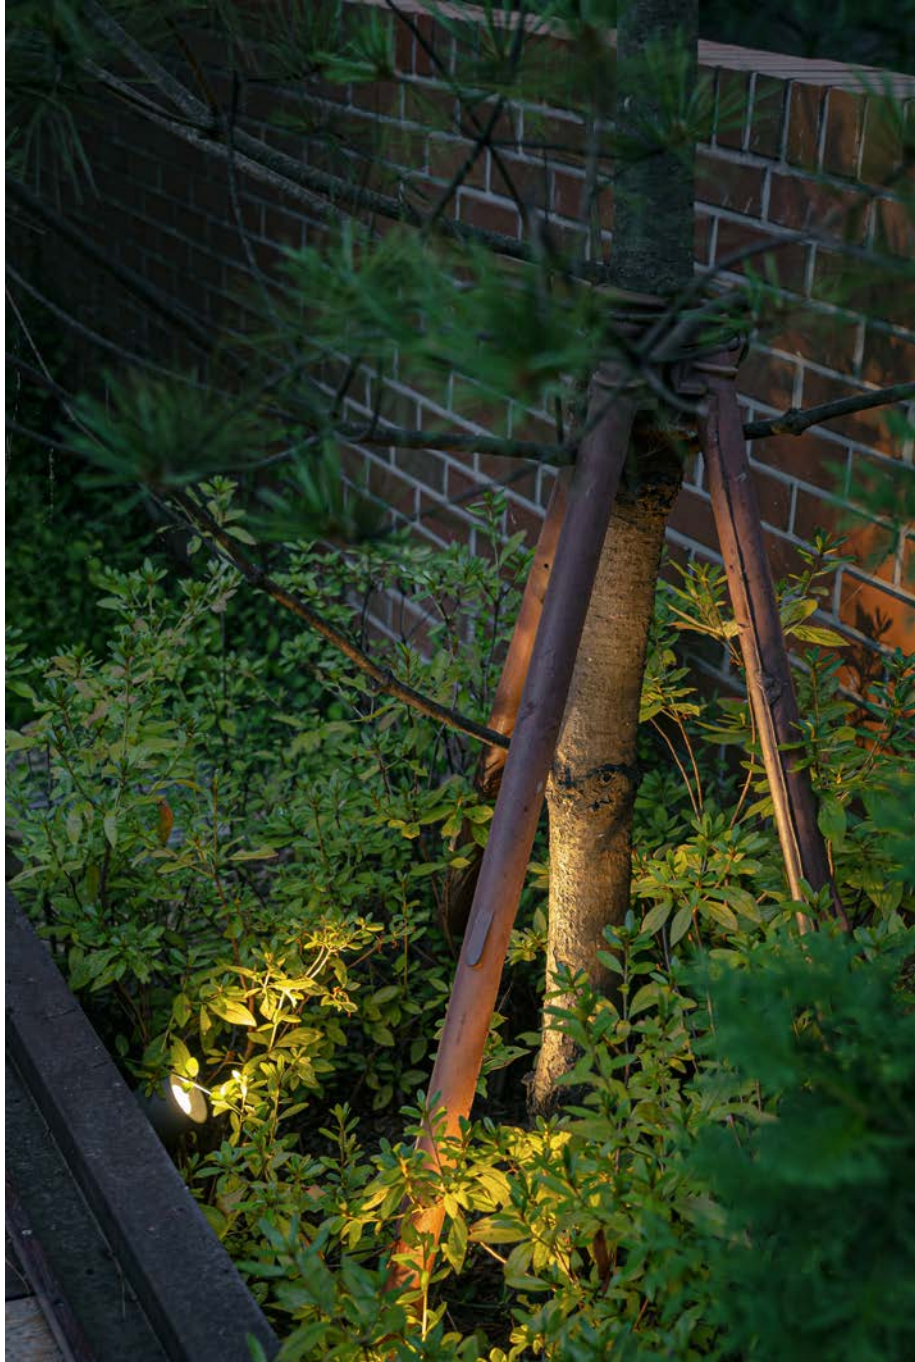

Emerald
Spike Light
5W
Textured Black
LeeJung, Prestige Homes



Emerald

Spike Light