




## Emerald

## Spotlight

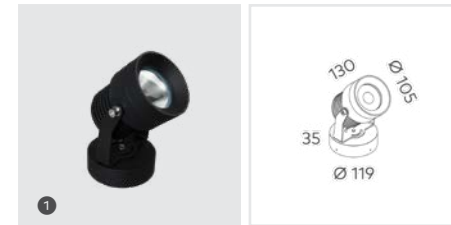

|                     | LED Power   | Lumens (at 3000K) | Beam | Weight |
|---------------------|-------------|-------------------|------|--------|
| 1 Emerald Spotlight | 25W (500mA) | 2072lm            | 40°  | 2.6kg  |

| Key Information |                  | Design         |                         | Performance               |                 | Driver    |          |
|-----------------|------------------|----------------|-------------------------|---------------------------|-----------------|-----------|----------|
| Mounting        | Surface Mounted  | Product Family | Emerald                 | Lumen efficacy            | Up to 82lm/W    | Phase Cut | Built-in |
| Finish          | ■ Textured Black | Adjustability  | 120° Tilt               | CRI (Ra/R9)               | 80+ (R9: >0)    | Bluetooth | Remote   |
| CCT             | ■ 3000K          | Material       | Powder Coated Aluminium | Lifetime (Ta 25°C)        | >60,000h L80B10 |           |          |
| Warranty        | 3 Years          | IP Rating      | IP65                    | Ambient Temperature Range | 10°- 30°C       |           |          |
|                 |                  | Class Rating   | Class I                 | SDCM                      | ≤3              |           |          |

