




## Evio

## Bollard Light

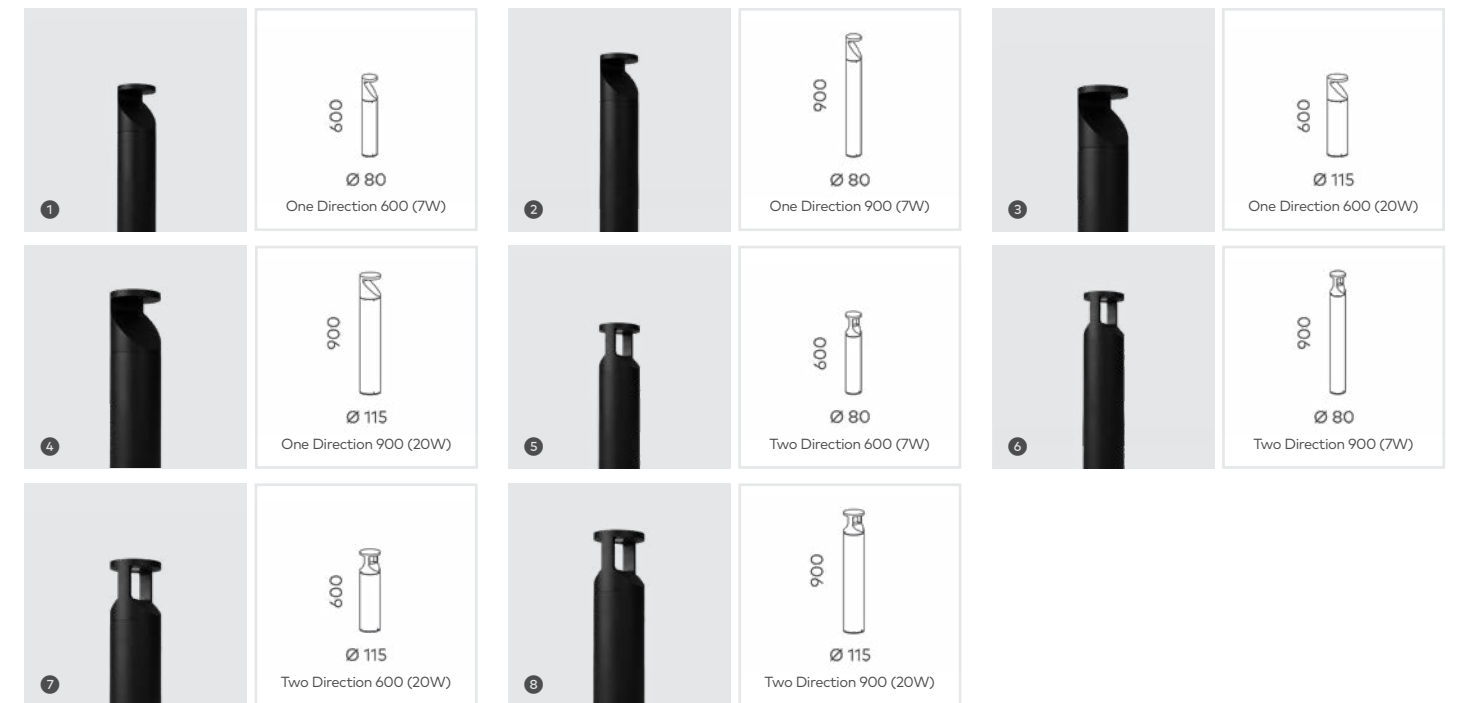

Variant	LED Power	Lumens (at 3000K)	Beam	Weight
1 2	7W (200mA)	460lm	40°	Up to 4kg
3 4	20W (600mA)	1000lm	40°	Up to 7kg
5 6	7W (200mA)	505lm	30°	Up to 4kg
7 8	20W (600mA)	1175lm	30°	Up to 6kg

Key Information		Design		Performance		Driver	
Mounting	Surface Mounted	Material	Powder Coated Aluminium	Lumen efficacy	Up to 59lm/W	Non-Dim	Built-in
Finish	■ Textured Black	IP Rating	IP65	CRI (Ra/R9)	80+ (R9: >0)	DALI	Remote
CCT	■ 3000K	IK Rating	IK10	Lifetime (Ta 25°C)	>55,000h L80B10	Bluetooth	Remote
Warranty	3 Years	Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		

