




Kinetic

Surface Mounted Downlight



	LED Power	Lumens (at 3000K)	Beam	Weight
1 Small (75mm)	9W (250mA)	755lm	23° 34° 50°	520g
2 Medium (100mm)	15W (400mA)	1205lm	15° 34° 50°	920g



Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Adjustability	350° Rotation, 90° Tilt	Lumen efficacy	Up to 78lm/W	Phase Cut	Built in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP20	UGR	<13	Bluetooth	Remote
Warranty	5 Year	Class Rating	Class I	Lifetime (Ta 25°C)	>55,000h L90B10		
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		
				COI Compliance model requirements	4000K		

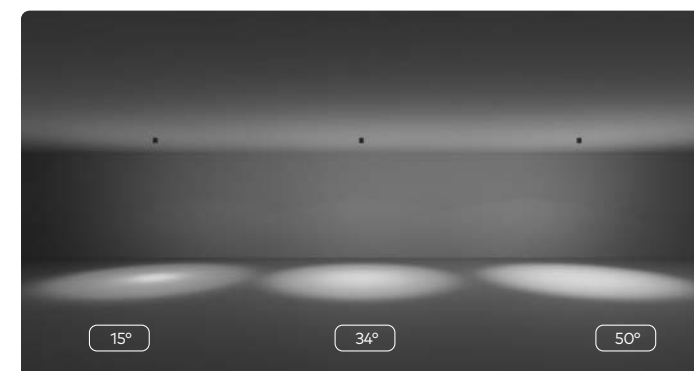



Kinetic

Surface Mounted Downlight



Kinetic
Surface Mounted Downlight
Medium (100mm)
Textured White
Linacre

Kinetic
Surface Mounted Downlight
Small (75mm)
Textured White
Prestige Homes