




Link

Wall Light

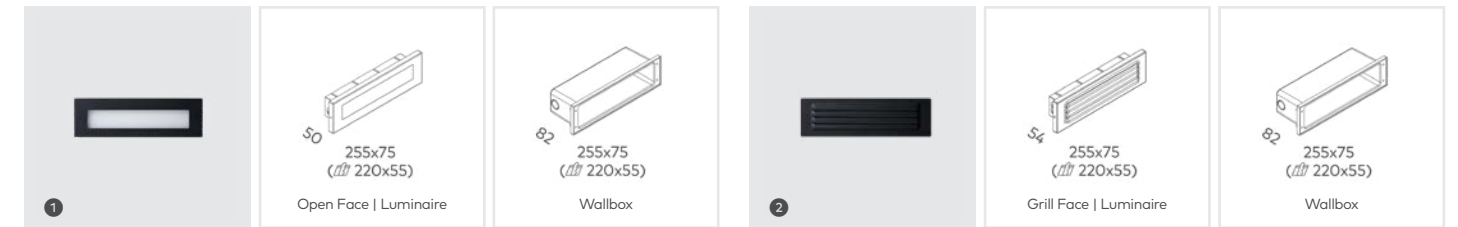

		LED Power	Lumens (at 3000K)	Beam	Weight	IK Rating	Driver Options
1	Open Face	3W/6W/9W (24V DC)	130lm/241lm/365lm	105°	742g	IK08	Non-Dim
		9W (24V DC)	365lm				Phase Cut, DALI, Bluetooth
2	Grill Face	3W/6W/9W (24V DC)	28lm/51lm/76lm	105°	784g	IK10	Non-Dim
		9W (24V DC)	76lm				Phase Cut, DALI, Bluetooth

Key Information	
Mounting	Wall Recessed
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White <input type="checkbox"/> Textured Grey
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K
Warranty	3 Years

Design	
Material	Powder Coated Aluminium, PVC Wall Box
IP Rating	IP65
Class Rating	Class III

Performance	
Lumen efficacy	Up to 39lm/W
CRI (Ra/R9)	80+ (R9:>0)
Lifetime (Ta 25°C)	>54,000h L70B10
Ambient Temperature Range	10°- 30°C
SDCM	≤3

Driver	
Non-Dim	Remote, wired in parallel
Phase Cut	Remote, wired in parallel
DALI	Remote, wired in parallel
Bluetooth	Remote, wired in parallel

