





Ovo

Wall Light

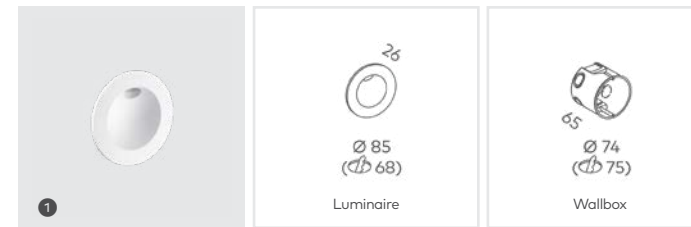

| | LED Power | Lumens (at 3000K) | Beam | Weight |
|------------------|------------|-------------------|------|--------|
| 1 Ovo Wall Light | 2W (700mA) | 95lm | 120° | 258g |


| Key Information | | Design | | Performance | | Driver | |
|-----------------|--|--------------|---------------------------------------|---------------------------|-----------------|-----------|---|
| Mounting | Wall Recessed | Material | Powder Coated Aluminium, PVC Wall Box | Lumen efficacy | Up to 30lm/W | Non-Dim | Remote, wired in series |
| Finish | <input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White | IP Rating | IP65 | CRI (Ra/R9) | 80+ (R9:>0) | DALI | Remote, wired in series (must be installed in groups of 3+) |
| LED CCT | <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K | Class Rating | Class III | Lifetime (Ta 25°C) | >60,000h L80B10 | Bluetooth | Remote, wired in series (must be installed in groups of 5+) |
| Warranty | 3 Years | | | Ambient Temperature Range | 10°- 30°C | | |
| | | | | SDCM | ≤3 | | |

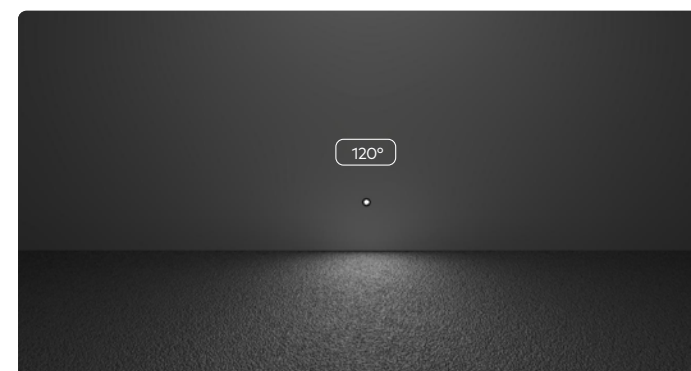



Ovo

Wall Light

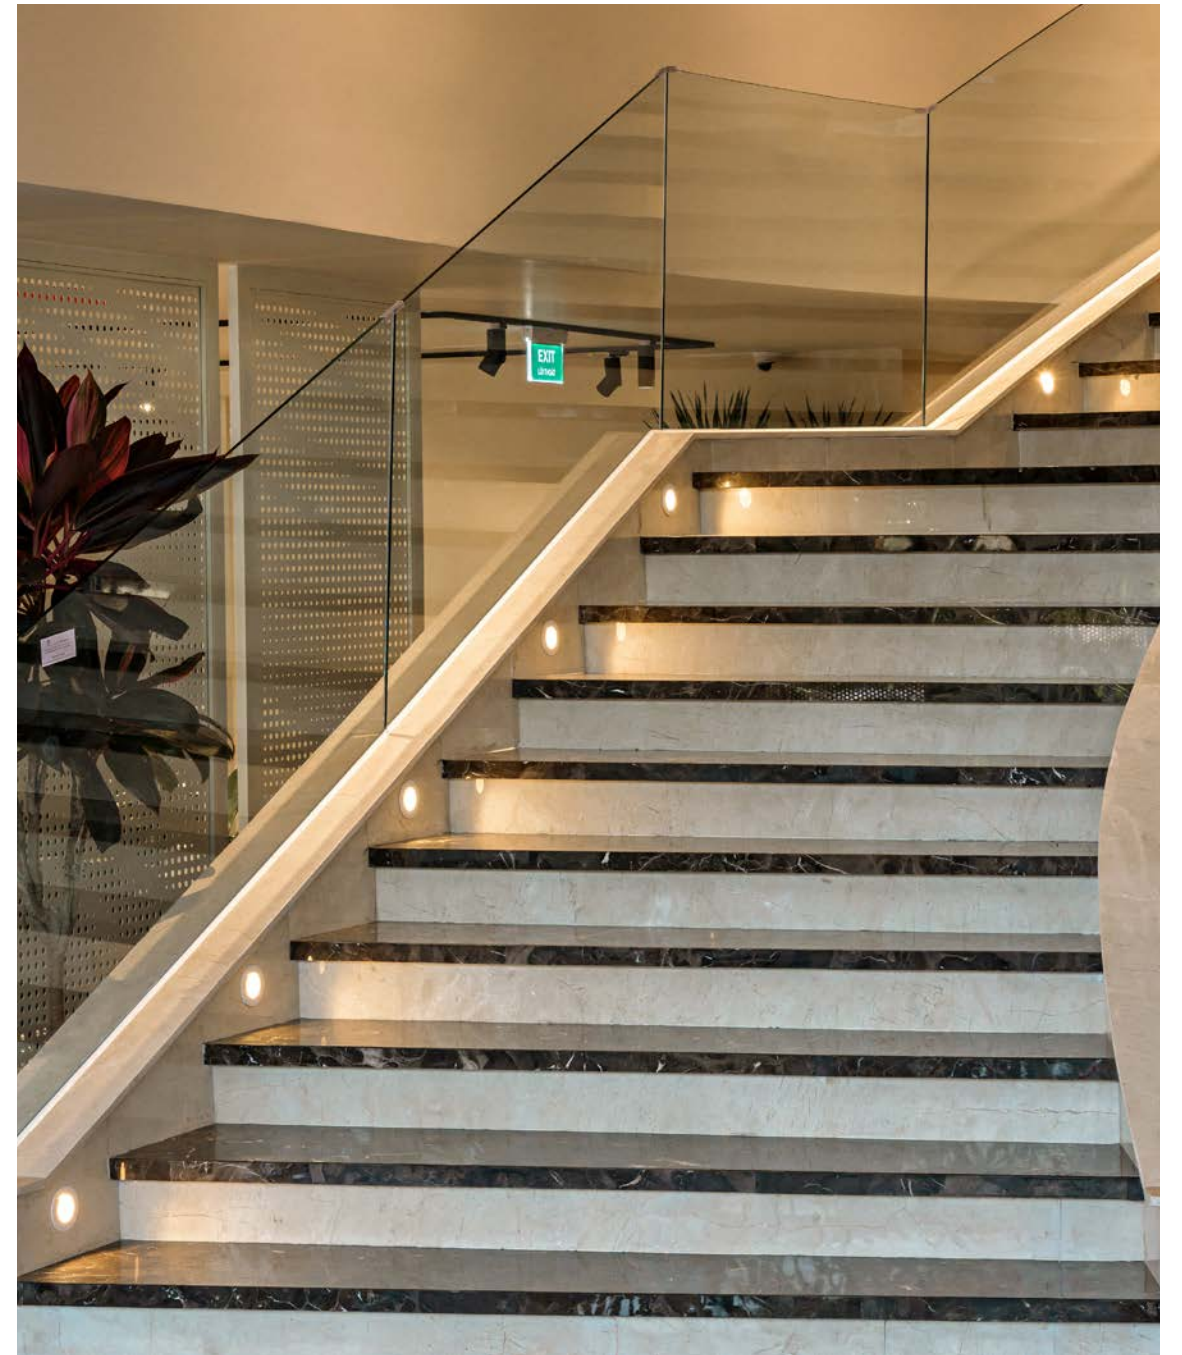

Ovo
Wall Light
Textured White
Bayview, Vias Hotel