
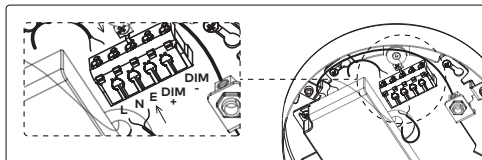


Wiring (Standard)

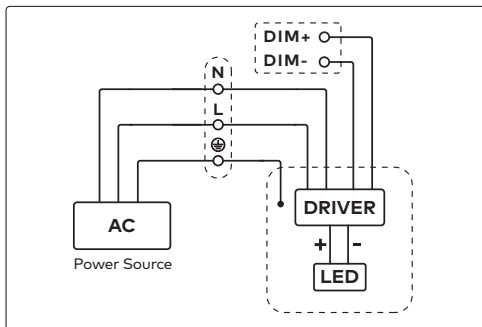

Driver Information

Product Code	Output Power	Driving Current	Forward Voltage
PORH/PORV0700.TB30	47	1050mA	26-43V
PORH/PORV0900.TB30	58	1400mA	34-46V
PORH/PORV1000.TB30	63	1400mA	34-46V
PORH/PORV0700.TBTW	48	1800mA	24V DC
PORH/PORV0900.TBTW	58	2000mA	24V DC
PORH/PORV1000.TBTW	72	2200mA	24V DC


Dimming

This luminaire can be dimmed through the use of 1-10V Analogue dimming. For Tunable White option, dimming is controlled through Casambi Bluetooth hardware/software.

For full list of compatible drivers, see unios.com

Cleaning

Warning: Before cleaning, disconnect from mains supply and allow luminaire to cool.

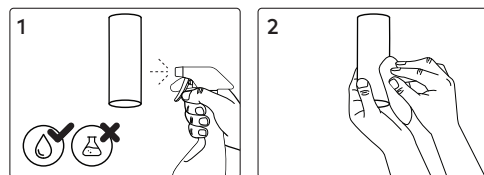

Disposal

Ensure correct disposal of this product (waste electrical and electronic equipment)




Ambient Conditions

Recommended to install in an ambient temperature <35°C.



Wiring (Tunable White)

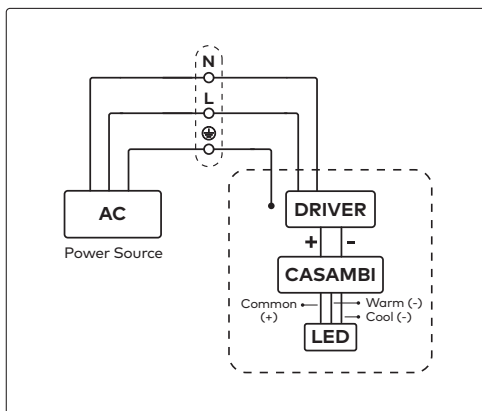

Portal Tunable White comes with standard built-in Casambi enabled hardware.

For instructions on setting up Casambi, please visit unios.com/casambi.

Portal

PENDANT SERIES


Base Codes (Horizontal)	H700 PORH0700	H900 PORH0900	H1000 PORH1000	Power (Standard) 47 58 63 Watts					
Base Codes (Vertical)	V700 PORV0700	V900 PORV0900	V1000 PORV1000	Power (Tunable White) 48 58 72 Watts					
	Class I 220-240V - 50/60Hz		IP Rating 20		Material Aluminium		Install Person/s 2x		

CAUTION - This product must be installed by a qualified installer
Please read instruction manual carefully before installing luminaire

Surge Protection
For comprehensive protection of a luminaire against electrical surges, surge protection shall be installed on the mains supply where required to protect luminaires and drivers from transient voltage damage.

For warranty information visit unios.com/warranty

Please read these installation instructions carefully before installing this luminaire. This product must be installed and maintained by a suitably qualified person/s in compliance with the latest applicable regulations and relevant legislation. Unios does not warrant any claim based on defects or damage caused by misuse, improper installation, improper operation and/or modifications carried out by the purchaser or third parties. This luminaire will not be used as a 'Working light' during construction. This will result in the warranty of the luminaire to be void. For warranty duration, please refer to the data sheet.

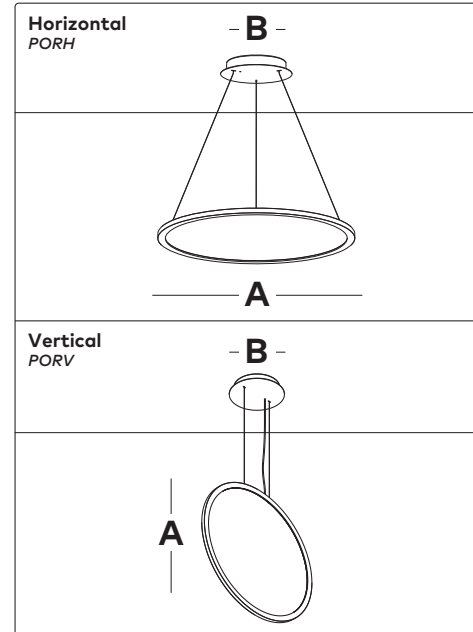


Sizing Variations







Product Code	A	B
Horizontal		
PORH0700	730	265
PORH0900	905	265
PORH1000	1080	265
Vertical		
PORV0700	730	265
PORV0900	905	265
PORV1000	1080	265

All measurements are in millimetres.

Parts

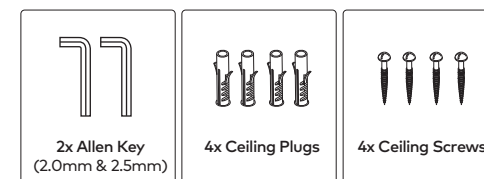

Horizontal PORHXXXX

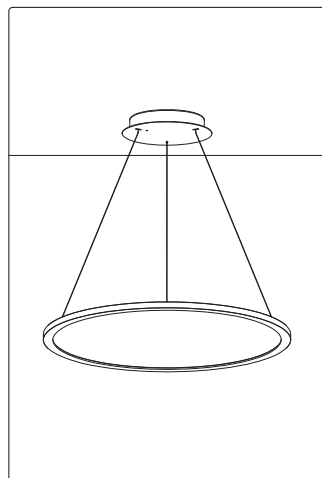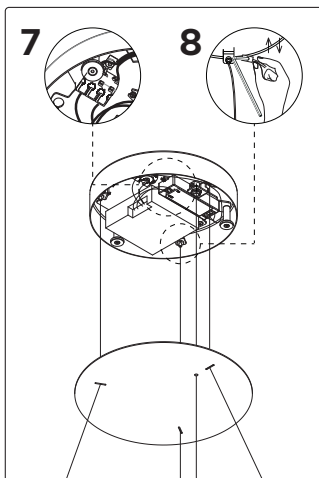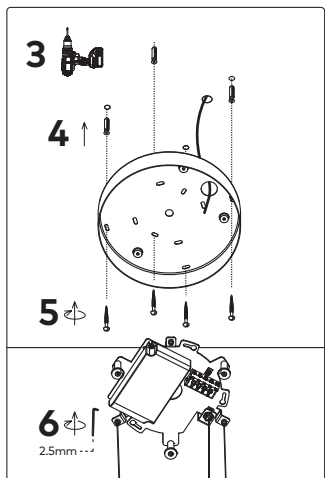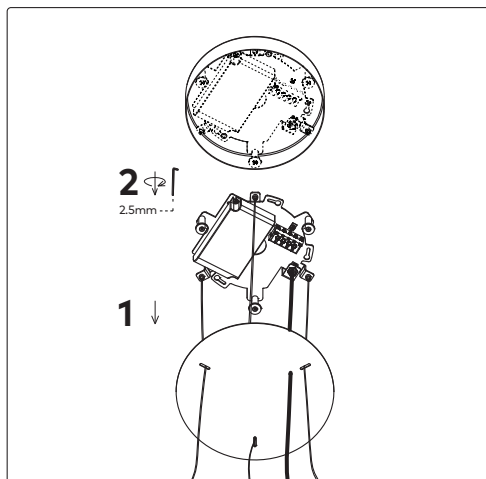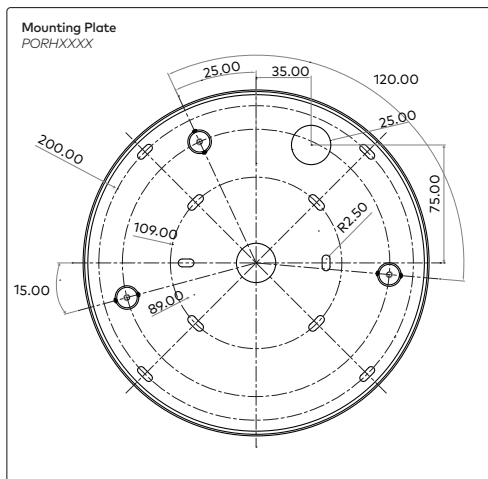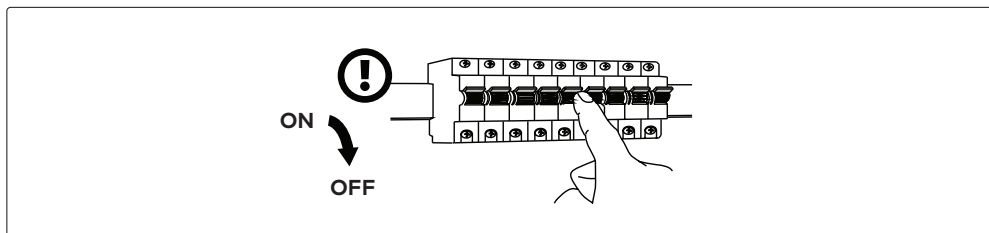

Vertical PORVXXXX

