




Quantum

Slotter Light

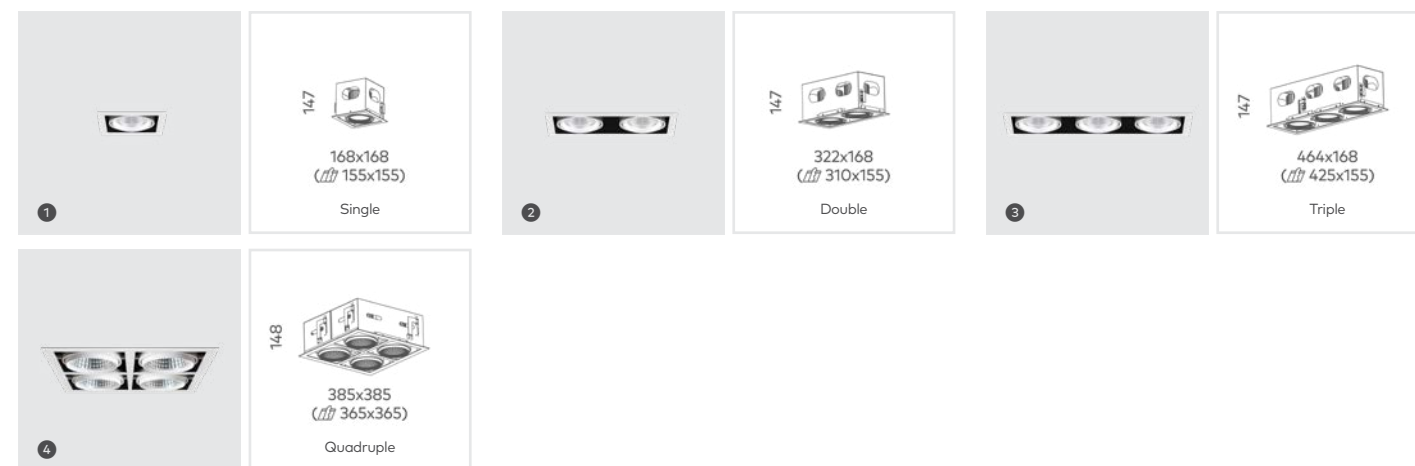

		LED Power	Lumens (at 3000K)	Beam	Weight
1	Single	28W (700mA)	245lm	15° 30° 45° 60°	1.3kg
		35W (900mA)	3055lm		
2	Double	56W (700mA)	2x 245lm	15° 30° 45° 60°	2.5kg
		70W (900mA)	2x 3055lm		
3	Triple	84W (700mA)	3x 245lm	15° 30° 45° 60°	3.7kg
		105W (900mA)	3x 3055lm		
4	Quadruple	112W (700mA)	4x 245lm	15° 30° 45° 60°	5.0kg
		140W (900mA)	4x 3055lm		

Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Adjustability	350° Rotation, 45° Tilt	Lumen efficacy	Up to 90lm/W	Phase Cut	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White/Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP20	UGR	<19	Bluetooth	Remote
Warranty	5 Year	Class Rating	Class II	Lifetime (Ta 25°C)	>55,000h L90B10		
		Insulation Rating	CA90	Ambient Temperature Range	10°- 30°C		
				SDCM	≤2		
				COI Compliance model requirements	4000K		

