




Radius

Pathway Light

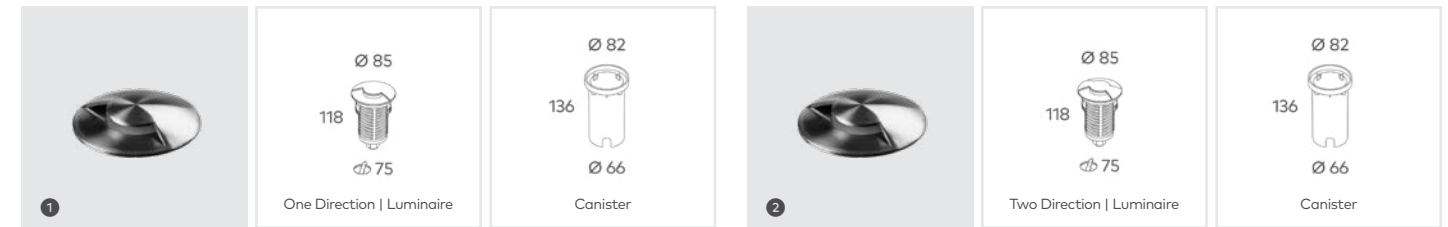

	LED Power	Lumens (at 3000K)	Beam	Weight
1 One Direction	7W (24V DC)	30lm	100°	750g
2 Two Direction	7W (24V DC)	30lm	100°	750g

Key Information		Design		Performance		Driver	
Mounting	Recessed	Material	316 Stainless Steel	Lumen efficacy	Up to 31lm/W	Non-Dim	Remote, wired in parallel
Finish	<ul style="list-style-type: none"> ■ Textured Black ■ 316 Stainless Steel 	IP Rating	IP67	CRI (Ra/R9)	80+ (R9: >0)		
CCT	3000K	IK Rating	IK10	Lifetime (Ta 25°C)	>50,000h L70B10		
Warranty	3 Years	Maximum Load	1000kg	Ambient Temperature Range	10°- 30°C		
		Class Rating	Class III	SDCM	≤3		

