




## Supalux

## Ceiling Light

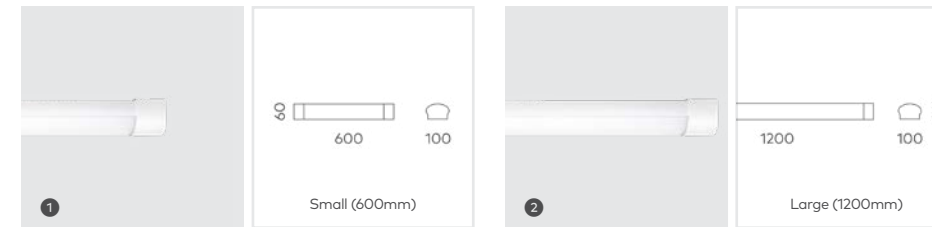

		LED Power	Lumens (at 3000K)	Beam	Weight
1	Small (600mm)	18W (300mA)	1390lm	120°	1.5kg
2	Large (1200mm)	35W (600mA)	3290lm	120°	890g

Key Information		Design		Performance		Driver	
Mounting	Ceiling Surface	Material	Powder Coated Aluminium, PC Diffuser	Lumen efficacy	Up to 87lm/W	Non-Dim	Built in
Finish	<input type="checkbox"/> Textured White	IP Rating	IP40	CRI (Ra/R9)	80+ (R9: >0)		
LED CCT	<input checked="" type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Class Rating	Class I	UGR	<25		
Warranty	3 Year			Lifetime (Ta 25°C)	>65,000h L70B10		
				Ambient Temperature Range	10°- 30°C		
				SDCM	≤4		

